

SELEZIONE NOTA PER CHIAMATA INTERCOMUNICANTE
TONE SETUP FOR INTERCOMMUNICATING CALL
SELECTION TONALITÉ POUR APPEL INTERCOMMUNICANT
TONWAHL FÜR WECHSELSPRECHRUF
SELECCIÓN NOTA PARA LLAMADA INTERCOMUNICANTE
SELEÇÃO TONALIDAD PARA CHAMADA INTERCOMUNICANTE

BC = 1 NOTA INTERCOMUNICANTE
 1 INTERCOMMUNICATING TONE
 1 TONALITÉ INTERCOMMUNICANTE
 1 WECHSELSPRECHTON
 1 NOTA INTERCOMUNICANTE
 1 NOTA INTERCOMUNICANTE

AB = 2 NOTE INTERCOMUNICANTI
 2 INTERCOMMUNICATING TONES
 2 TONALITÉS INTERCOMMUNICANTES
 2 WECHSELSPRECHRUFTÖNE
 2 NOTAS INTERCOMUNICANTES
 2 TONALIDADES INTERCOMUNICANTES

A- Targa per videocitofono
 Video-intercom panel
 Plaque de rue pour portier-vidéo
 Video-Türsprechstelle
 Placa para vídeo-portero
 Telecâmara botoneira
 Art. 5449/... - 2550/301-302
 serie-série GALILEO - PATAVIUM
 GALILEO SECURITY

B- Pulsante supplementare serratura
 Additional push-button for lock
 Poussoir supplémentaire gâche
 zusätzliche Türöffnertaste
 Pulsador suplementario cerradura
 Botão suplementar de trinco

C- Serratura elettrica-Electric lock
 Gâche électrique-Elektrischer Türöffner
 Cerradura eléctrica-Trinco eléctrico 12V-

D- Telecamera con posto esterno
 Camera with speech unit
 Caméra avec micro et haut-parleur
 Kamera mit Außenstelle
 Câmara com aparato externo
 Telecâmara com posto externo
 Art.554-554/00R-558-559-570-571

L1- Lampada luce targa
 Bulb for panel lighting
 Lampe d'éclairage plaque
 Birne für Tastenbeleuchtung
 Lâmpara luz escalera
 Lâmpada da luz da botoneira
 (3x24V 3W max.)
 10x24V 3W con/with Art. M832
 16X24V 3W con/with Art. 832/030



SCHEMA COLLEGAMENTO IMPIANTO VIDEOCITOFONO MONOFAMILIARE CON 9 CITOFONI INTERCOMUNICANTI
WIRING DIAGRAM FOR SINGLE RESIDENCE VIDEO-INTERCOM SYSTEM WITH 9 INTERCOMMUNICATING PHONES.
SCHÉMA CONNEXION PORTIER VIDÉO POUR UNE VILLA AVEC 9 POSTES D'INTERCOMMUNICATION.
SHALTPLAN FÜR EINFAMILIENHÄUSER MIT 9 WECHSELSPRECHSHAUSTELEFONEN.
ESQUEMA DE CONEXIONADO PARA UNA INSTALACIÓN DE VIDEO PORTERO MONOFAMILIAR CON 9 TELÉFONOS INTERCOMUNICANTES
ESQUEMA DE LIGAÇÃO PARA UMA INSTALAÇÃO MONOFAMILIAR COM 9 TELEFONES INTERCOMUNICANTES.

Diametro conduttori - Conductor diameter


Diamètre des conducteurs-Leiterdurchmesser

Diametro conductores-Diámetro condutores

Conductors-Condutores	Ø fino a 50m-Ø up to 50m Ø jusqu'à 50m-Ø bis 50m Ø hasta 50m - até 50m	Ø fino a 100m-Ø up to 100m Ø jusqu'à 100m.-Ø bis 100m Ø hasta 100m - até 100m	Ø fino a 200m-Ø up to 200m Ø jusqu'à 200m.-Ø bis 200m Ø hasta 200m - até 200m
Comune e serratura Common and lock Commun et gâche Gemeinsame und Türöffner Común y cerradura Commun e trinco Altri-Others-Autres Andere-Otros-Outros	1 mm ²	1,5 mm ²	2,5 mm ²
	0,75 mm ²	1 mm ²	1,5 mm ²

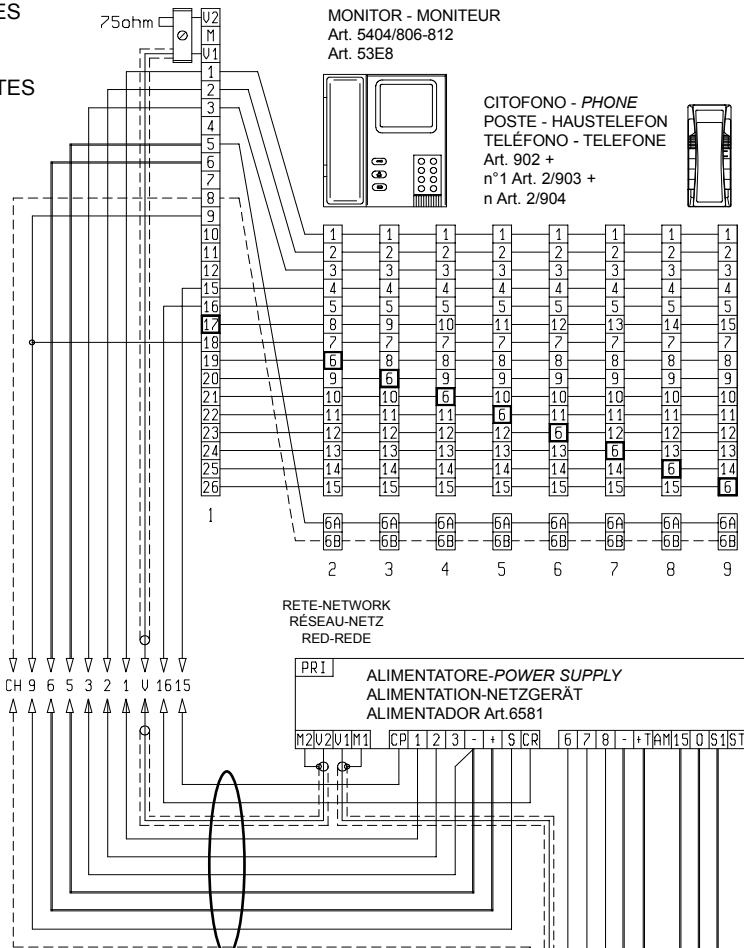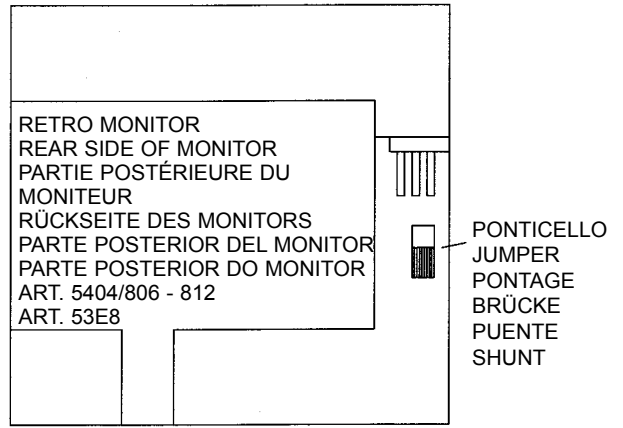

CAVO-CABLE
 CÂBLE-KABEL
 CABLE-CABO
 Art. 61/001
 Art. 63/001

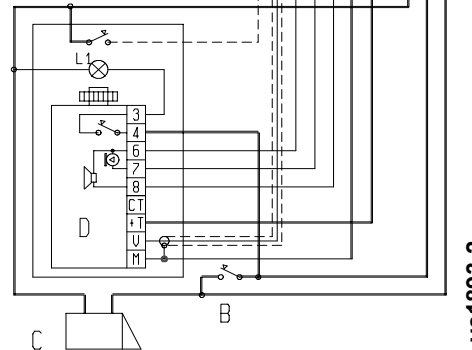

ITALY DISEGNO N° vc1893-2

Cod. S60.53E.800 ed. 00 2/2002

Il prodotto è conforme alla direttiva europea 89/336/CEE + 92/31/CEE + 93/68/CEE + 93/97/CEE.
 Product is according to EC Directives 89/336/EEC + 92/31/EEC + 93/68/EEC + 93/97/EEC.

